

ORDERING A BOLD OR CONVERSION TABLE FROM THE STANDARD SOL

When ordering a single table (Bold or Conversion), you need the following:

1. CHOOSE COLUMN TYPE

- Fixed
- Pin Adjustable
- Electric Height Adjustable
- Pneumatic (Gas) Adjustable

2. CHOOSE COLUMN KIT

- Single Stage
- Dual Stage
- Up/Down Switch
- PGM Switch
- 2 Leg Configuration
- 3 Leg Configuration

3. CHOOSE J-CHANNEL KIT

See 3-Leg J-Rail Guide on page 2 for help determining size if needed.

- 2 Leg Configuration (1 J-Rail Kit)
- 3 Leg Configuration (2 J-Rail Kits)

Qty: _____
 Length of Top: _____

4. CHOOSE FOOT KIT

- T Foot
- C Foot
- 24"
- 30"
- Glides
- Casters

5. CHOOSE COLOR

- Standard Provide Color Code _____
- Custom Fill out Custom Color Request Form
- Color Match Provide sample to Sales, ship to address below

PO CHECKLIST


Send PO to orders@omt-veyhl.com
 See PO Help Sheet.

- Part numbers with matching descriptions
- OMT-Veyhl color code
- Ship-to address
- Clearly stated order title (ex. **MOCKUP** or **REPLACEMENT**)
- Date of PO submission
- Request date of delivered product
- Additional information (ex. box label requirements)

Once we receive the complete PO, Customer Service will respond within 48 hours.

Orders for standard product will have a formal acknowledgment with a promised ship date within 48 hours.

Orders for new (unreleased product) may take longer to acknowledge due to engineering and/or database structuring.

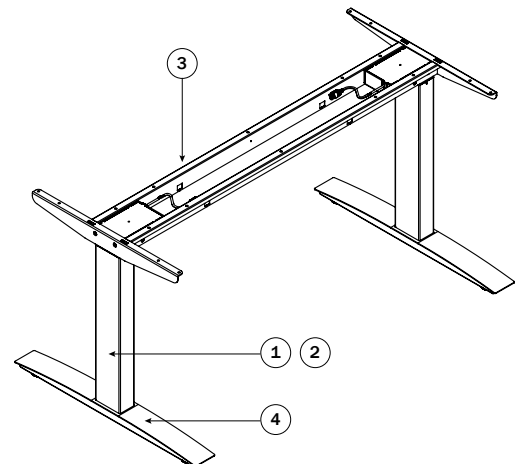

SEE SOL FOR PRICING
 OR CALL SALES AT 616-738-6688



11511 James Street • Holland, MI 49424 • 616.738.6688 • omt-veyhl.com

Terms of Use: The user is responsible for determining the suitability of OMT-Veyhl products for specific applications. © OMT-Veyhl 2017

v 083017

3-LEG J-RAIL GUIDE

To determine what size J-Rail you need to include in your order, reference the charts below.

TABLE SIZE (A)	J-RAIL SIZE (B)		
90 DEGREE	24" T&C LEG	30" T LEG	30" C LEG
48 IN (1219.2 mm)	36 IN (684 mm)	30 IN (533.4 mm)	36 IN (684 mm)
54 IN (1371.6 mm)	42 IN (836.4 mm)	36 IN (684 mm)	42 IN (836.4 mm)
60 IN (1524 mm)	48 IN (988.8 mm)	42 IN (836.4 mm)	48 IN (988.8 mm)
66 IN (1676.4 mm)	54 IN (1141 mm)	48 IN (988.8 mm)	54 IN (1141 mm)
72 IN (1828.8 mm)	60 IN (1293.6 mm)	54 IN (1141 mm)	60 IN (1293.6 mm)
78 IN (1981.2 mm)	66 IN (1446 mm)	60 IN (1293.6 mm)	66 IN (1446 mm)
84 IN (2133.6 mm)	72 IN (1598.4 mm)	66 IN (1446 mm)	72 IN (1598.4 mm)
120 DEGREE	24" T&C LEG	30" T&C LEG	
48 IN (1219.2 mm)	42 IN (836.4 mm)	42 IN (836.4 mm)	
54 IN (1371.6 mm)	48 IN (988.8 mm)	48 IN (988.8 mm)	
60 IN (1524 mm)	54 IN (1141 mm)	54 IN (1141 mm)	
66 IN (1676.4 mm)	60 IN (1293.6 mm)	60 IN (1293.6 mm)	
72 IN (1828.8 mm)	66 IN (1446 mm)	66 IN (1446 mm)	
78 IN (1981.2 mm)	72 IN (1598.4 mm)	72 IN (1598.4 mm)	
84 IN (2133.6 mm)	78 IN (1750.4 mm)	78 IN (1750.4 mm)	