OV1001

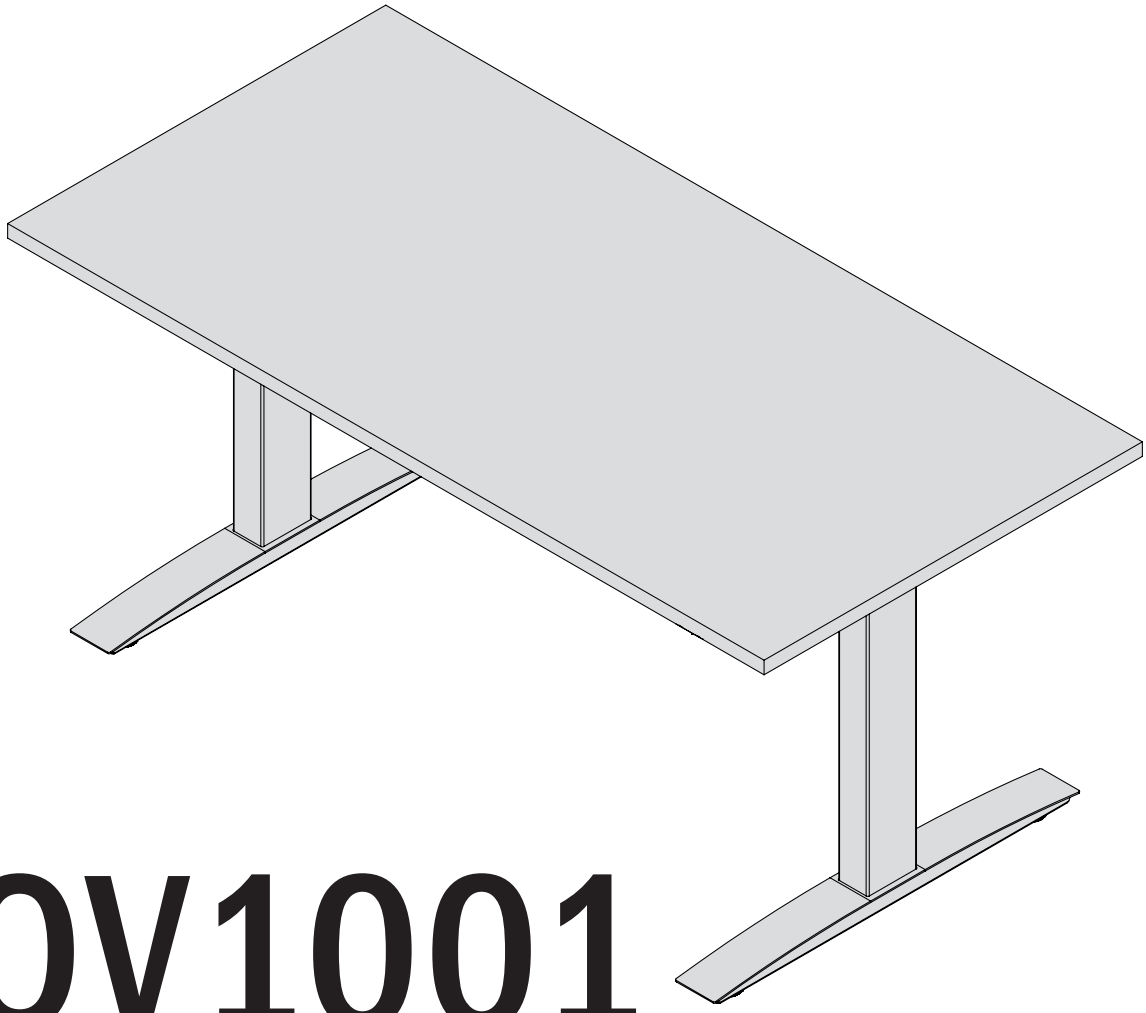

OV1001

HEIGHT ADJUSTABLE TABLE

DISASSEMBLY GUIDE

OV1001

HEIGHT ADJUSTABLE TABLE

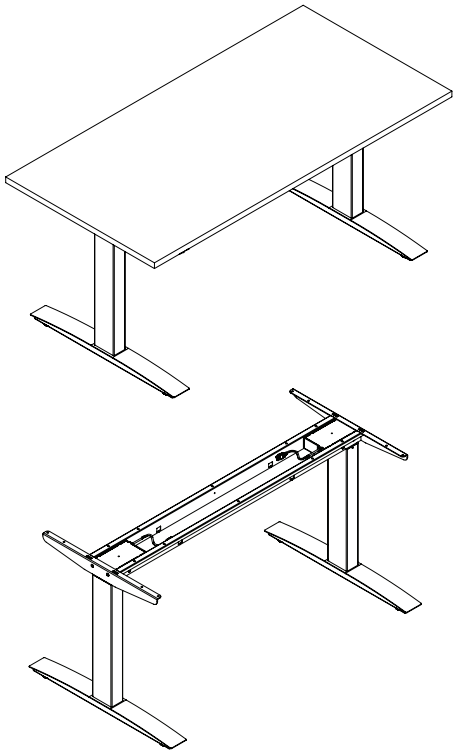

A healthier work environment starts with the option to sit or stand throughout the day. The OV1001 table is the industry standard in height-adjustable products, and your first step towards improving the efficiency and well-being of your organization.

Customizable to your standards, OV1001 can support benching for multiple workstations or be used as stand-alone solutions. This kit supplies everything you need to assemble your height-adjustable table base. Just add your own work surface to personalize.

FEATURES

- Full table base (add your own work surface)
- Meets BIFMA X5.5 standards
- UL 962 approved
- Over 150 color options
- Rated at 225 lb. load per two-column kit

TABLE OF CONTENTS

Parts Diagram 4-7

- Full Length 4
- Independent 5
- Adjustable L-Rail 6
- Three-Leg 7

Disassembly Instructions 8-11

Customer Service 12

Standards & Certifications 12

This manual explains how this sit-stand desk is disassembled, used, and maintained. All sit-stand tables are subjected to functional and quality tests before leaving

OV1001
PARTS DIAGRAM

FULL LENGTH
For tables up to 84"

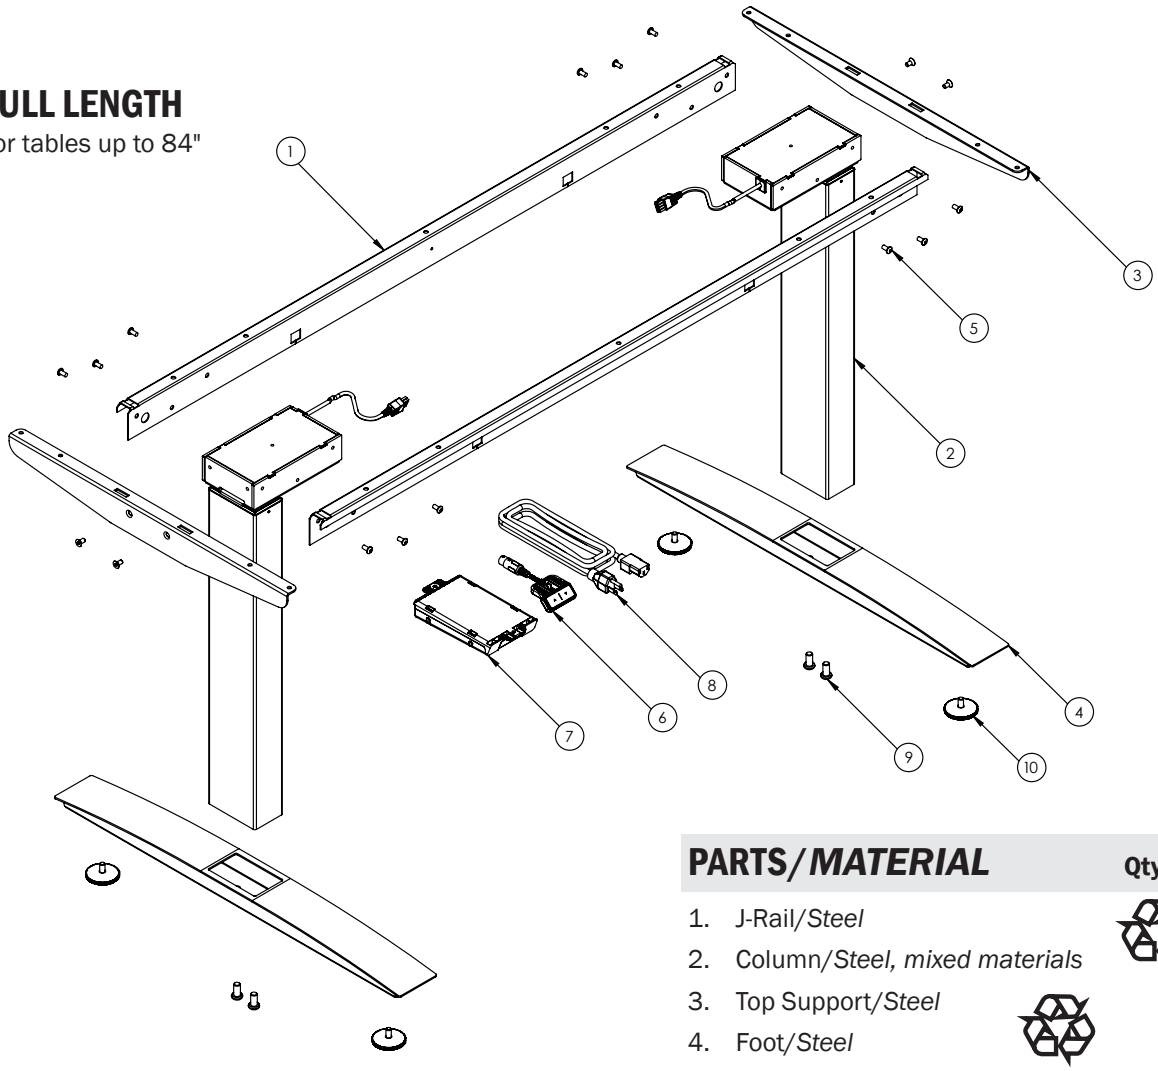

PARTS/*MATERIAL*	Qty/Package
1. J-Rail/*Steel*	2
2. Column/*Steel, mixed materials*	2
3. Top Support/*Steel*	2
4. Foot/*Steel*	2
5. M6x1.0 12mm Screw/*Steel*	16
6. Handswitch/*Mixed plastic,metals E*	1
7. Control Box/*Mixed plastic,metals E*	1
8. Power Cord/*Copper,mixed materials E*	1
9. M10x1.5 20mm Screw/*Steel*	4
10. Glide/*Steel,rubber*	4

INDEPENDENT

For tables 60" or Less

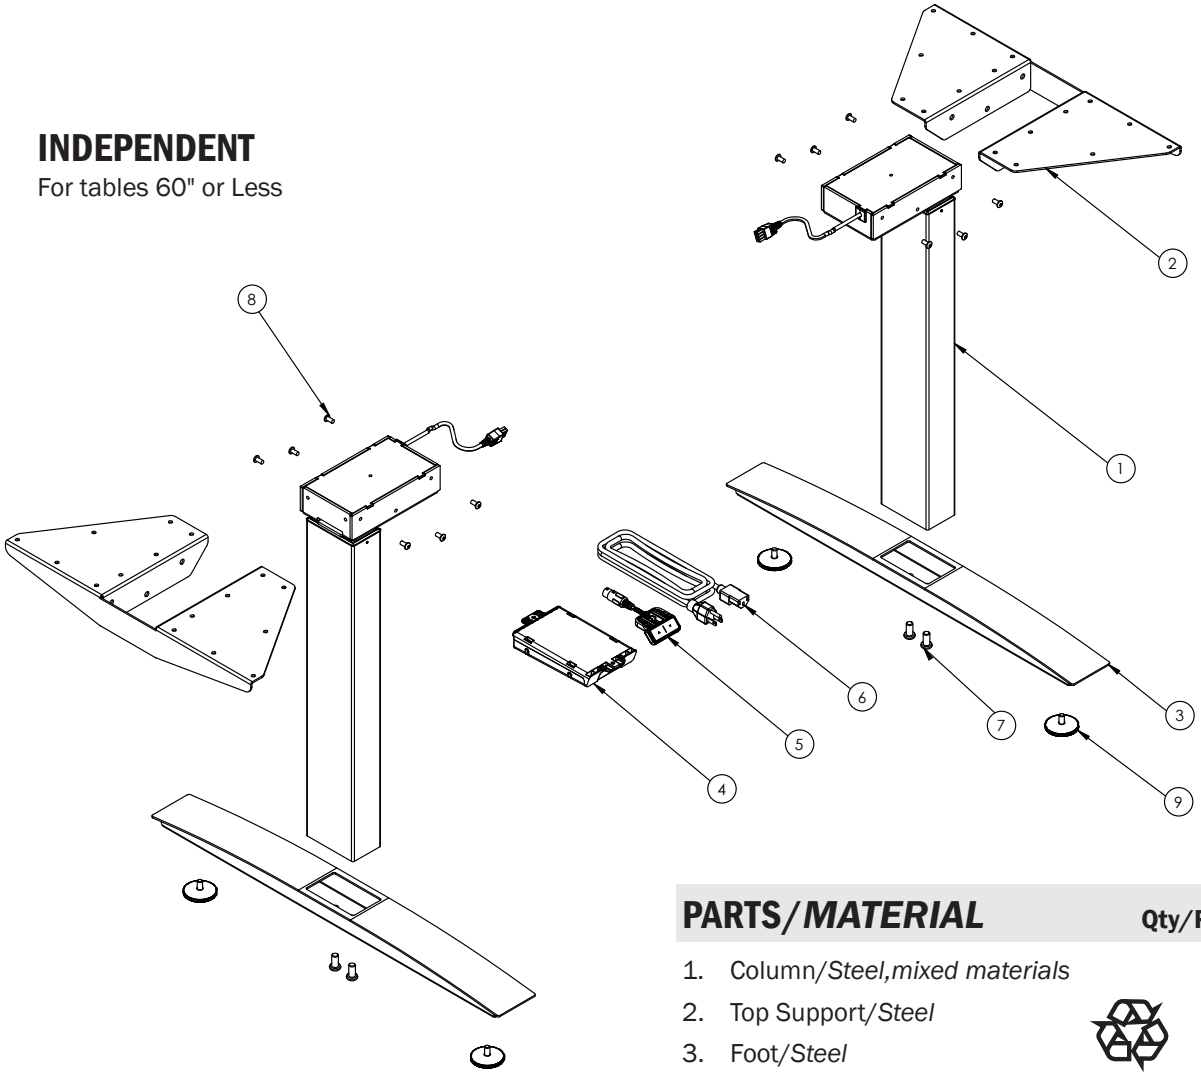

PARTS/*MATERIAL*	Qty/Package
1. Column/*Steel,mixed materials*	2
2. Top Support/*Steel*	2
3. Foot/*Steel*	2
4. Control Box/*Mixed plastic,metals E*	1
5. Handswitch/*Mixed plastic,metals E*	1
6. Power Cord/*Copper,mixed materials E*	1
7. M10x1.5 20mm Screw/*Steel*	4
8. M6x1.0 12mm Screw/*Steel*	12
9. Glide/*Steel,rubber*	4

ADJUSTABLE L-RAIL

For tables up to 84”

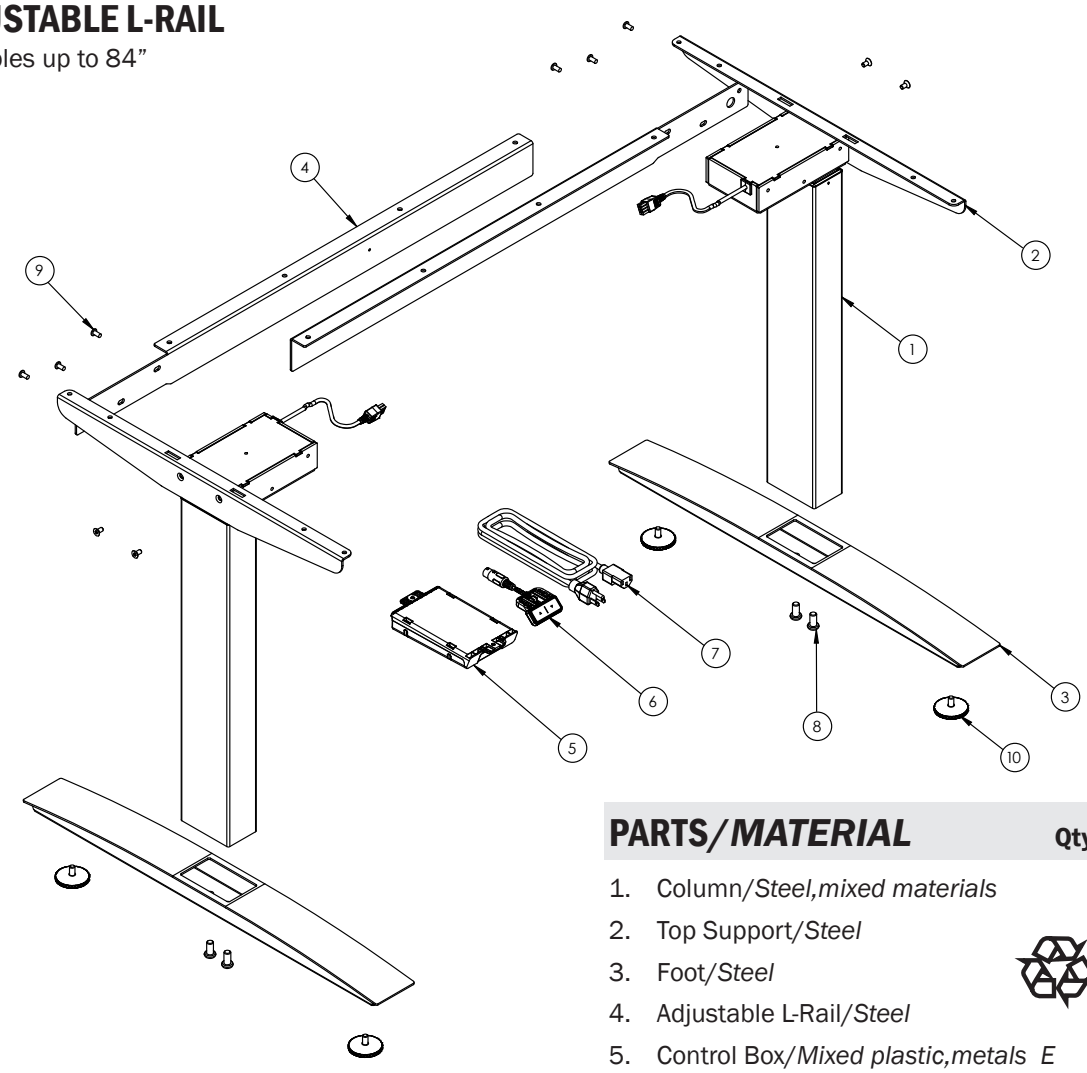

PARTS/*MATERIAL*	Qty/Package
1. Column/*Steel,mixed materials*	2
2. Top Support/*Steel*	2
3. Foot/*Steel*	2
4. Adjustable L-Rail/*Steel*	2
5. Control Box/*Mixed plastic,metals E*	1
6. Handswitch/*Mixed plastic,metals E*	1
7. Power Cord/*Copper,mixed materials E*	1
8. M10x1.5 20mm Screw/*Steel*	4
9. M6x1.0 12mm Screw/*Steel*	10
10. Glide/*Steel,rubber*	4

THREE-LEG

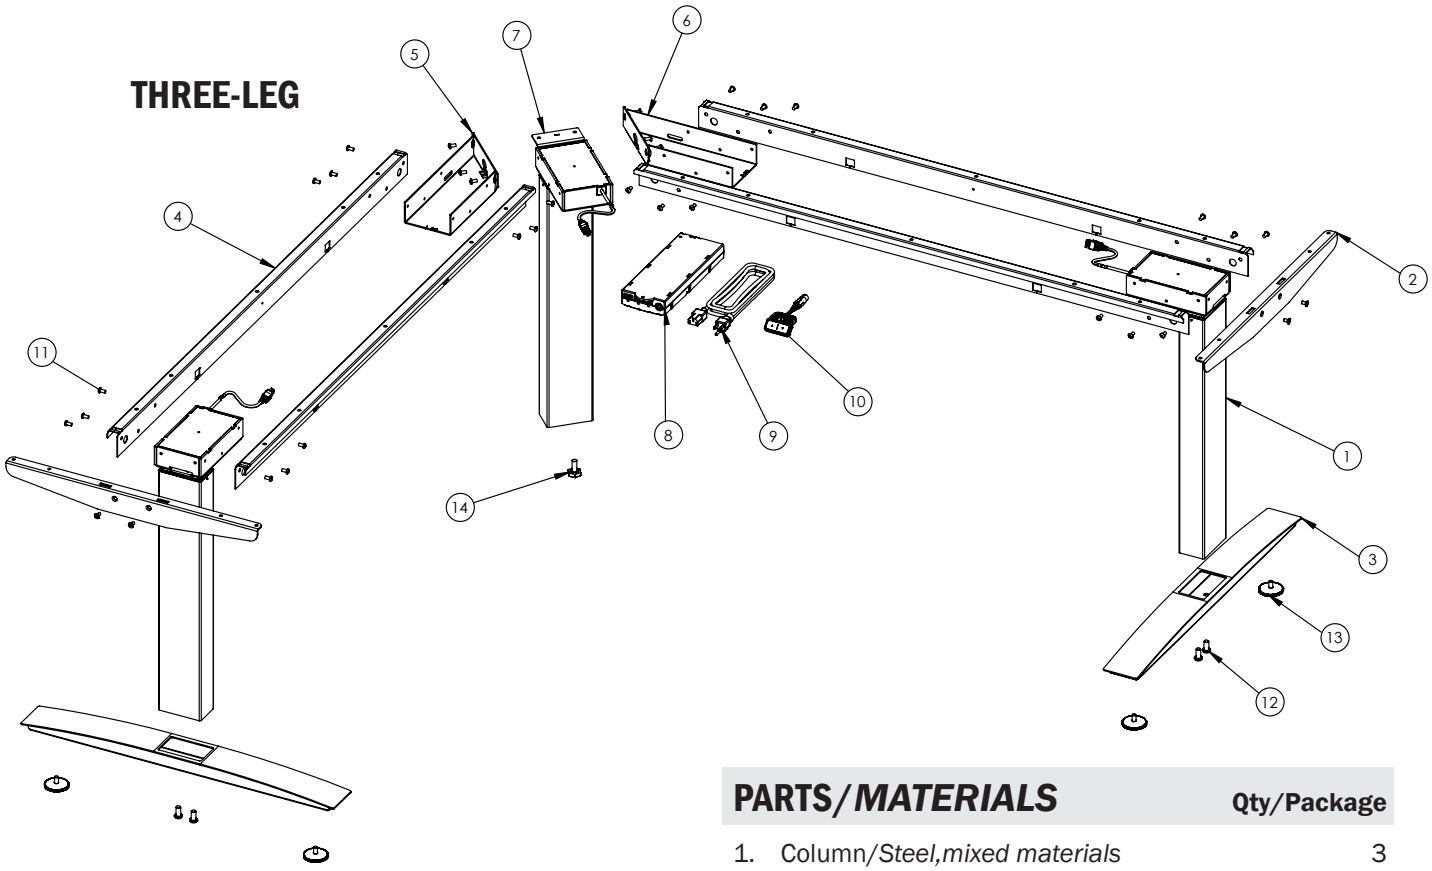

PARTS/*MATERIALS*	Qty/Package
1. Column/*Steel,mixed materials*	3
2. Top Support/*Steel*	2
3. Foot/*Steel*	2
4. J-Rail/*Steel*	4
5. Left Hand Adapter Bracket/*Steel*	1
6. Right Hand Adapter Bracket/*Steel*	1
7. Third Leg Bracket/*Steel*	1
8. Control Box/*Mixed plastic,metals E*	1
9. Power Cord/*Copper,mixed materials E*	1
10. Handswitch/*Mixed plastics,metals E*	1
11. M6x1.0 12mm Screw/*Steel*	36
12. M10x1.5 20mm Screw/*Steel*	4
13. Glide/*Steel,rubber*	4
14. Hex Leveler/*Steel,rubber*	1

DISASSEMBLY INSTRUCTIONS

The disassembly of the table frame to be made in accordance with this manual.
Changes to the table frame or improper use may affect the safety, function, and life of your product.

This manual is for all sit-stand tables from the OV1001 series.
Due to different models or types, pictures may vary.

DISASSEMBLY OVERVIEW

1. Detach all cables from the table frame or the underside of the table top
2. Disconnect the supplied power cord (AC) from the control box
3. Disconnect the handswitch (HS) cable from the control box
4. Disconnect the motor cables from the control box
5. Unfasten the control box and handswitch from the table top
6. Unfasten the table frame from the table top

7A. Disassemble the foot from the column

7. Disassemble the top support from the column
8. Disassemble the column from the j-rail
9. Disassemble the third column from the adapter brackets

Disassembly time: 15min - 30min varying on model

Tools needed: #3 Phillips screwdriver, M10 Allen wrench & M6 Allen wrench

Electronics(Labled with an *E*) can be recycled at your local electronics recycler

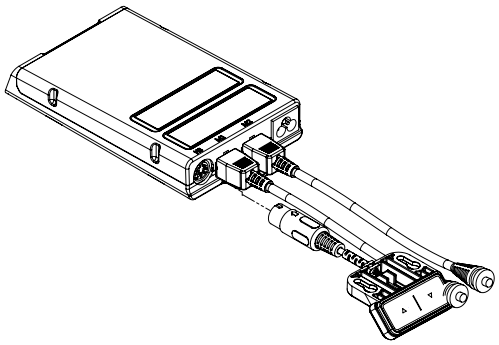

1 DISCONNECT THE HANDSWITCH (HS) CABLE FROM THE CONTROL BOX

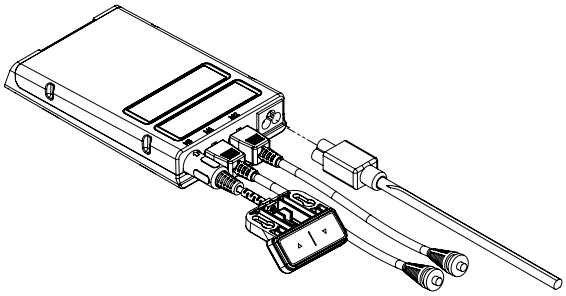

2 DISCONNECT THE SUPPLIED POWER CORD (AC) FROM THE CONTROL BOX

3 DETACH ALL CABLES FROM THE TABLE FRAME OR THE UNDERSIDE OF THE TABLE TOP

Detach cables in order to avoid any damage during operation.

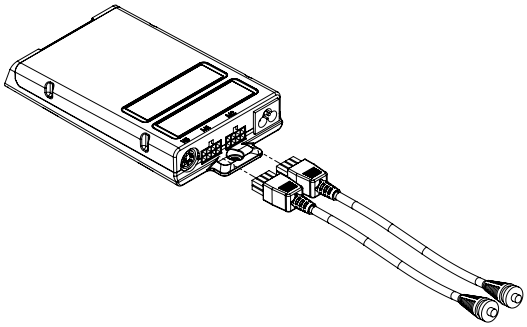

4 DISCONNECT THE MOTOR CABLES FROM THE CONTROL BOX

The motor cable plug-connection has to click out of place.

Connections to the control box:
M1-M2 = Connectors for the columns
HS = Connectors for the handset
AC = Connector for the power cord (3-pin)

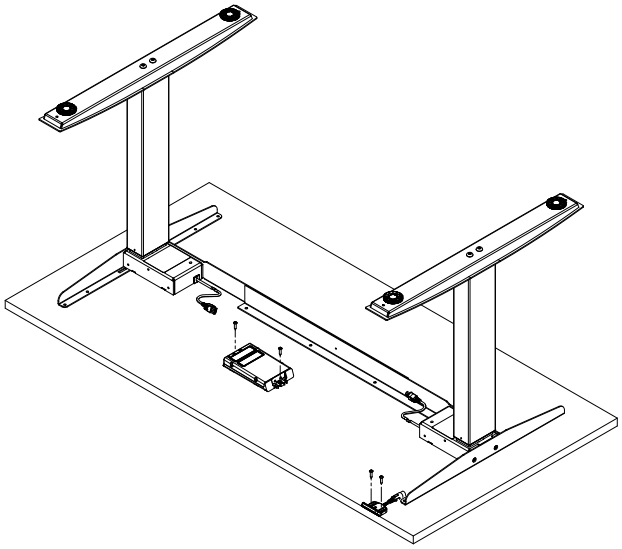

5 UNFASTEN THE CONTROL BOX AND HANDSWITCH FROM THE TABLE TOP

6 UNFASTEN THE TABLE FRAME FROM THE TABLE TOP

FULL LENGTH

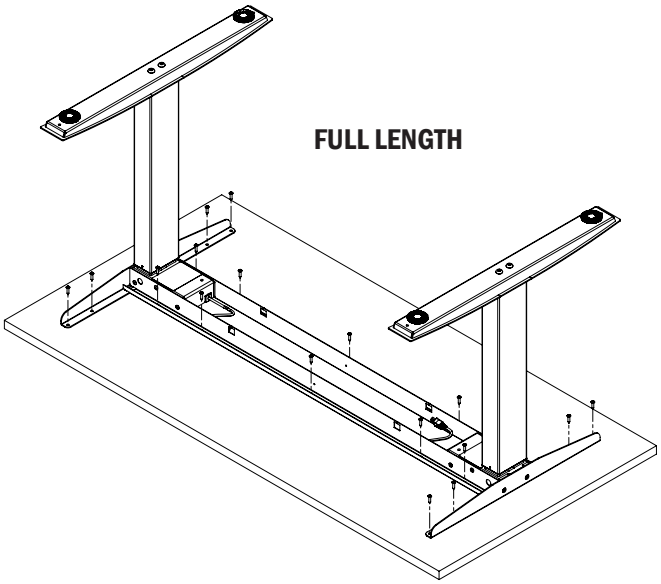

INDEPENDENT

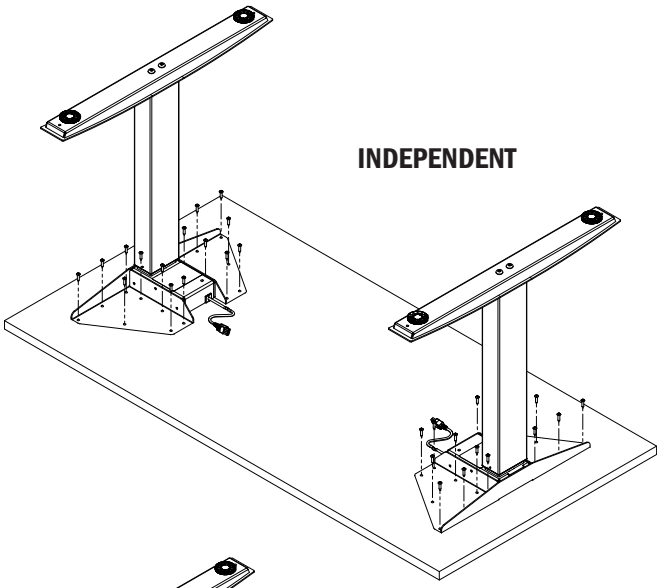

ADJUSTABLE L-RAIL

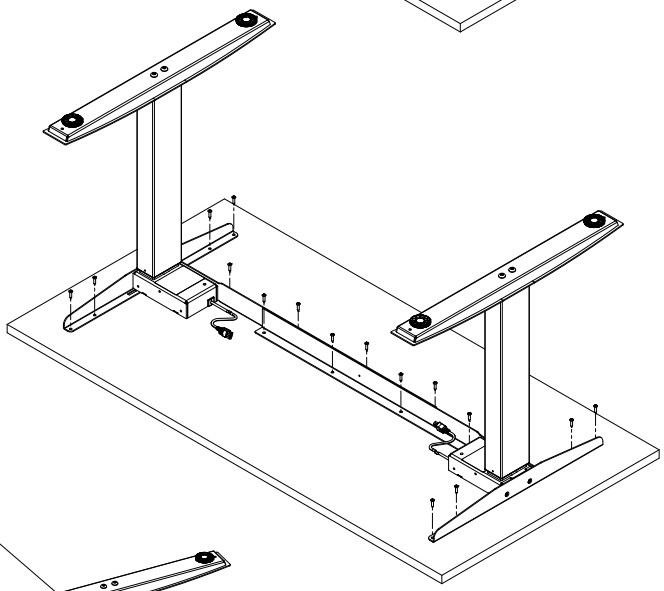

THREE-LEG

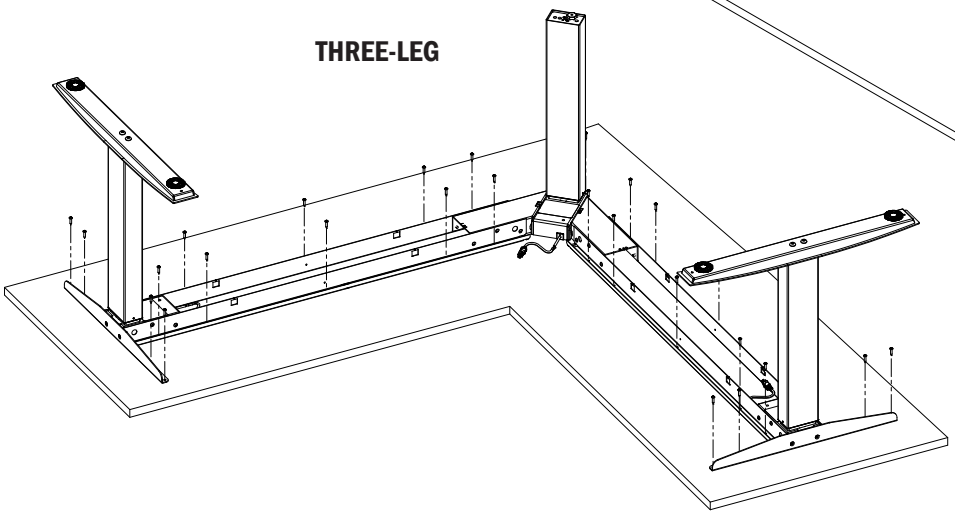

**Please make sure top supports are mounted 1.5" from edge of work surface.*

7a DISASSEMBLE THE THIRD COLUMN FROM THE ADAPTER BRACKETS (FOR THIRD LEG ASSEMBLY ONLY)

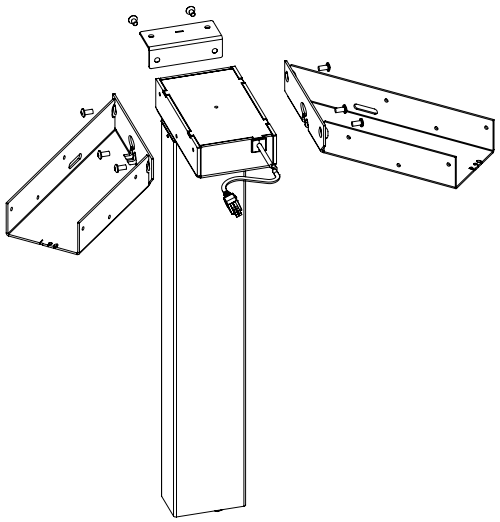

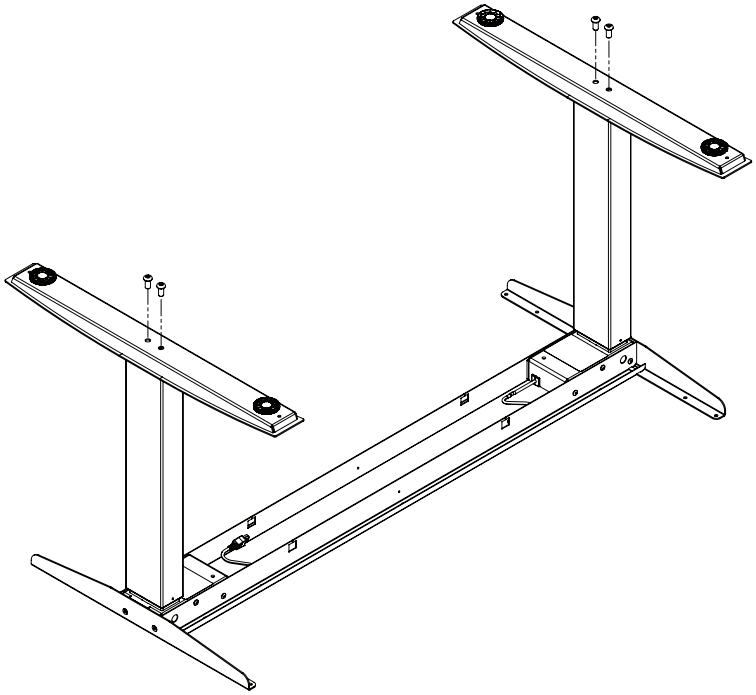

7 DISASSEMBLE THE FOOT TO THE COLUMN

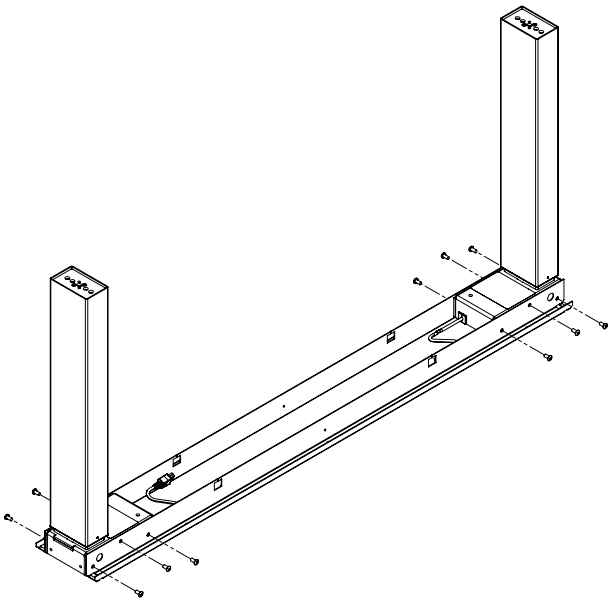

8 DISASSEMBLE THE COLUMN FROM THE J-RAIL

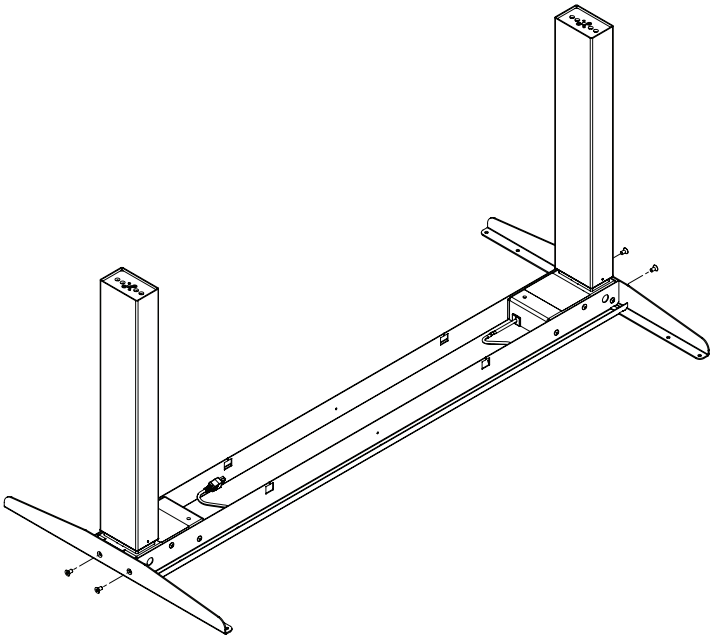

9 DISASSEMBLE THE TOP SUPPORT FROM THE COLUMN

CUSTOMER SERVICE

If you have any problems with your table base, please contact our service department.

PHONE: 1-616-738-6688
FAX: 1-616-738-6682

STANDARDS & CERTIFICATIONS

The drive system is tested according to the following standards:

UL 962
Issued: 2014/11/07 Ed: 4 Household and Commercial Furnishings

CSA C22.2#68
Issued: 2009/09/01 Ed: 7 (R2014)
Motor-Operated Appliances (Household and Commercial);
Gen. Inst. No.1: 2010, Gen. Inst. No.2: 2010

Meets 2014 BIFMA X5.5 standards.

WARRANTY

CONTACT YOUR SALES REPRESENTATIVE FOR WARRANTY INFORMATION

INTERTEK LISTING BELONGS TO:

System: Bold

OMT-Veyhl USA
11511 James Street
Holland, MI 49424

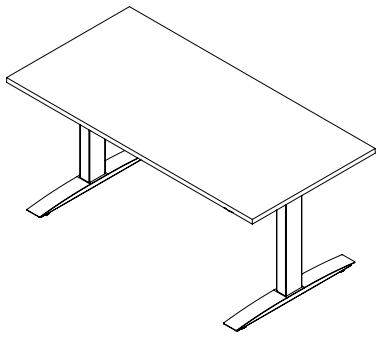

OV1001
DISASSEMBLY GUIDE