



Product Specs

BOLD TABLE BASE

FEATURES

- ✔ Full table base (add your own work surface)
- ✔ Meets BIFMA X5.5 standards
- ✔ UL 962 approved
- ✔ Over 150 color options



ADDITIONAL INFORMATION

- Sync up to six columns for larger tables
- Available in both rectangular and square columns
- Less than 50db noise level using ISO-11201:2010 acoustics
- Raising/lowering speed 1.5" per second
- Two-column bases can support 36" to 84" tabletops
- Three-column bases can support both 90° and 120° degree layouts with up to 84" tabletops
- Power consumption <0.3W
- Multiple handswitch and color options available within one order
- Dual stage high meets BIFMA's Ergonomics Guidelines for Furniture Used in Office Work Spaces

OPTIONS

HANDSWITCH OPTIONS



TOUCHbasic
(upgrade)



TOUCHinlay
(upgrade)



TOUCHFX
(upgrade)

FOOT OPTIONS



C Foot



T Foot

POWDER COAT COLOR OPTIONS

150+ colors available.

WARRANTY INFORMATION

Two Years Electronic components such as control boxes, handswitches, motors.


Five Years Mechanical components such as crank drives, spindles.

Ten Years Structural components such as beams, feet and top supports.

TECHNICAL SPECIFICATIONS

TYPE	STROKE LENGTH (IN)	HEIGHT MIN / MAX (IN)	TRAVEL SPEED (IN/sec)	MAX RATED LOAD (LB)	NOISE LEVEL (DB)
Single Stage (SSE)	18.9	26/45	1.5	225/250 <small>(two leg/three leg)</small>	<50
Dual Stage Low (DSL)	26	20/47	1.5	225/250 <small>(two leg/three leg)</small>	<50
Dual Stage High (DSH)	26.7	21/49	1.5	225/250 <small>(two leg/three leg)</small>	<50

DRAWING Standard Dimensions

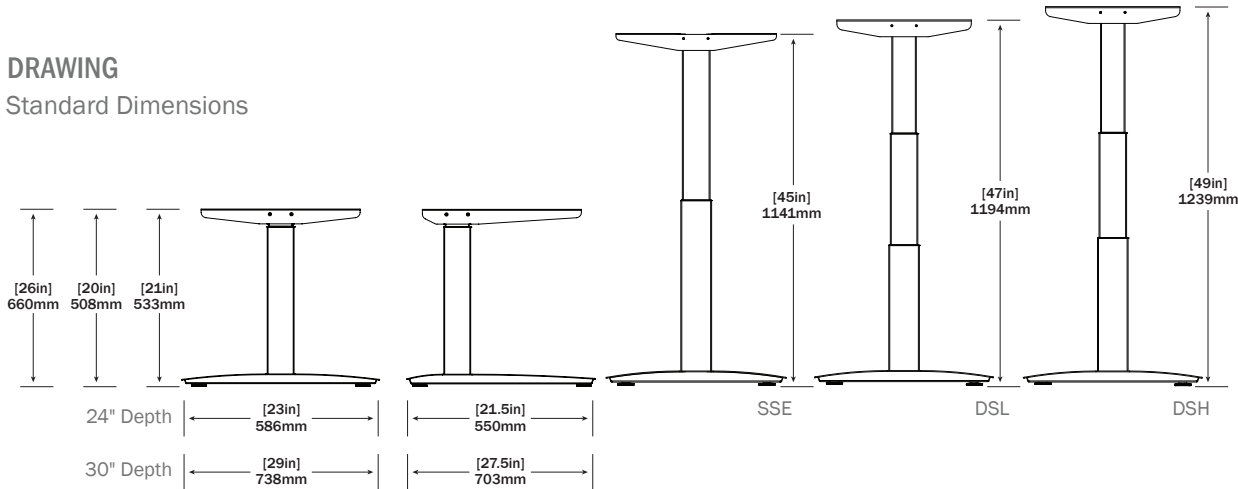

NOTES

- Base depths: 24" and 30"
- Base widths: 36"-84" (6" increments)
 Three Leg 90°: up to 84"
 Three Leg 120°: up to 84"
- Base heights: SSE: 26"-45"
 DSL: 20"-47"
 DSH: 21"-49"
- Max load: Rated load (including table top): 225 lb. (two-leg) and 250 lb. (three-leg)
 Functional load: 342 lb. (two-leg)



**BUILT
IN THE USA**

11511 James Street • Holland, MI 49424 • 616.738.6688 • omt-veyhl.com

Terms of Use: The user is responsible for determining the suitability of OMT-Veyhl products for specific applications. © OMT-Veyhl 2019

v 071619