







Features

Coordinating T-Leg, C-Leg, X-Base, Flip-Top and Height-Adjustable options

Meets BIFMA X5.5 standards

Ten-year warranty

Easy assembly

Over 150 color options with two-tone combinations available



STANDARD SPECIFICATIONS

- · Square columns only
- Standard height is 27.29" without top
- 24" and 30" depths available
- Max configuration size 30" x 72" for T-Leg Base
- Max 30" round or 24" square top for the X-Base

- Raising/lowering speed 1.5" per second
- Power consumption < 0.3W
- · Comes with adjustable glide feet
- · Caster feet standard with flip top

OPTIONS

BASE OPTIONS



T-Leg Base





C-Leg Base



X-Base

POWDER COAT COLOR OPTIONS 150+ colors available.

Two-tone color combinations available.

HANDSWITCH OPTIONS



TOUCHbasic (upgrade)



TOUCHinlay (upgrade)



(upgrade)

WARRANTY INFORMATION


Three Years Electronic components such as control boxes, handswitches, motors. Five Years Mechanical components such as crank drives, spindles. Ten Years Structural components such as beams, feet and top supports.


Height Adjustable


Base

TECHNICAL SPECIFICATIONS

ТҮРЕ	STROKE LENGTH (IN)	HEIGHT MIN / MAX (IN)	TRAVEL SPEED (IN/sec)	MAX WEIGHT (LB)	NOISE LEVEL (DB)
Single Stage (SSE)	18.9	25/44	1.5	225	<50
Dual Stage Low (DSL)	26	20/46	1.5	225	<50

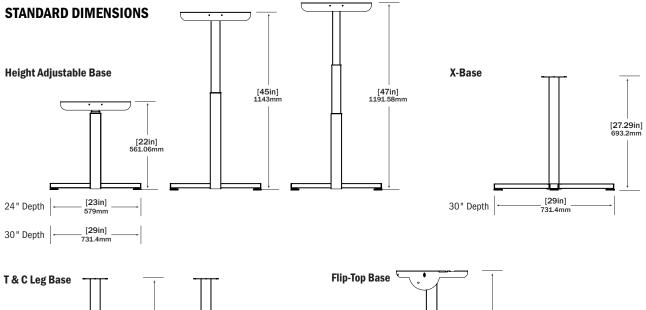





NOTES

- Base depths: 24" and 30"
- Base widths: 36"-84" (6" increments)
- Max load: Rated load (including table top): 225 lb. Functional load: 342 lb.



